
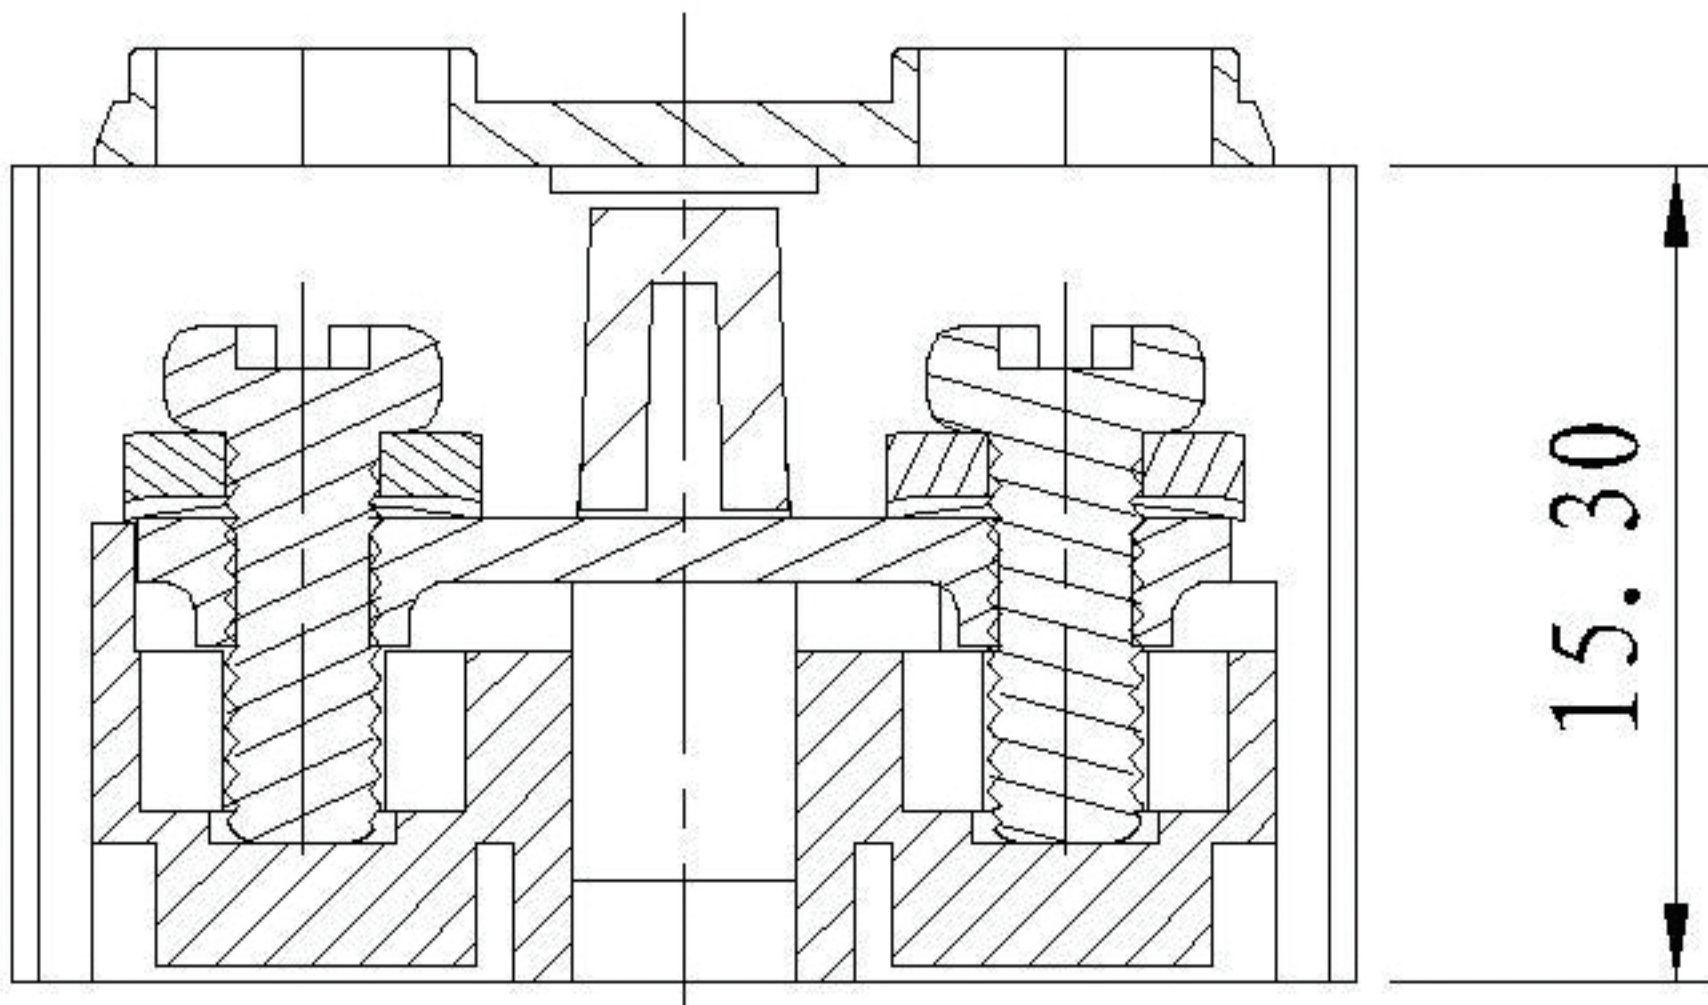
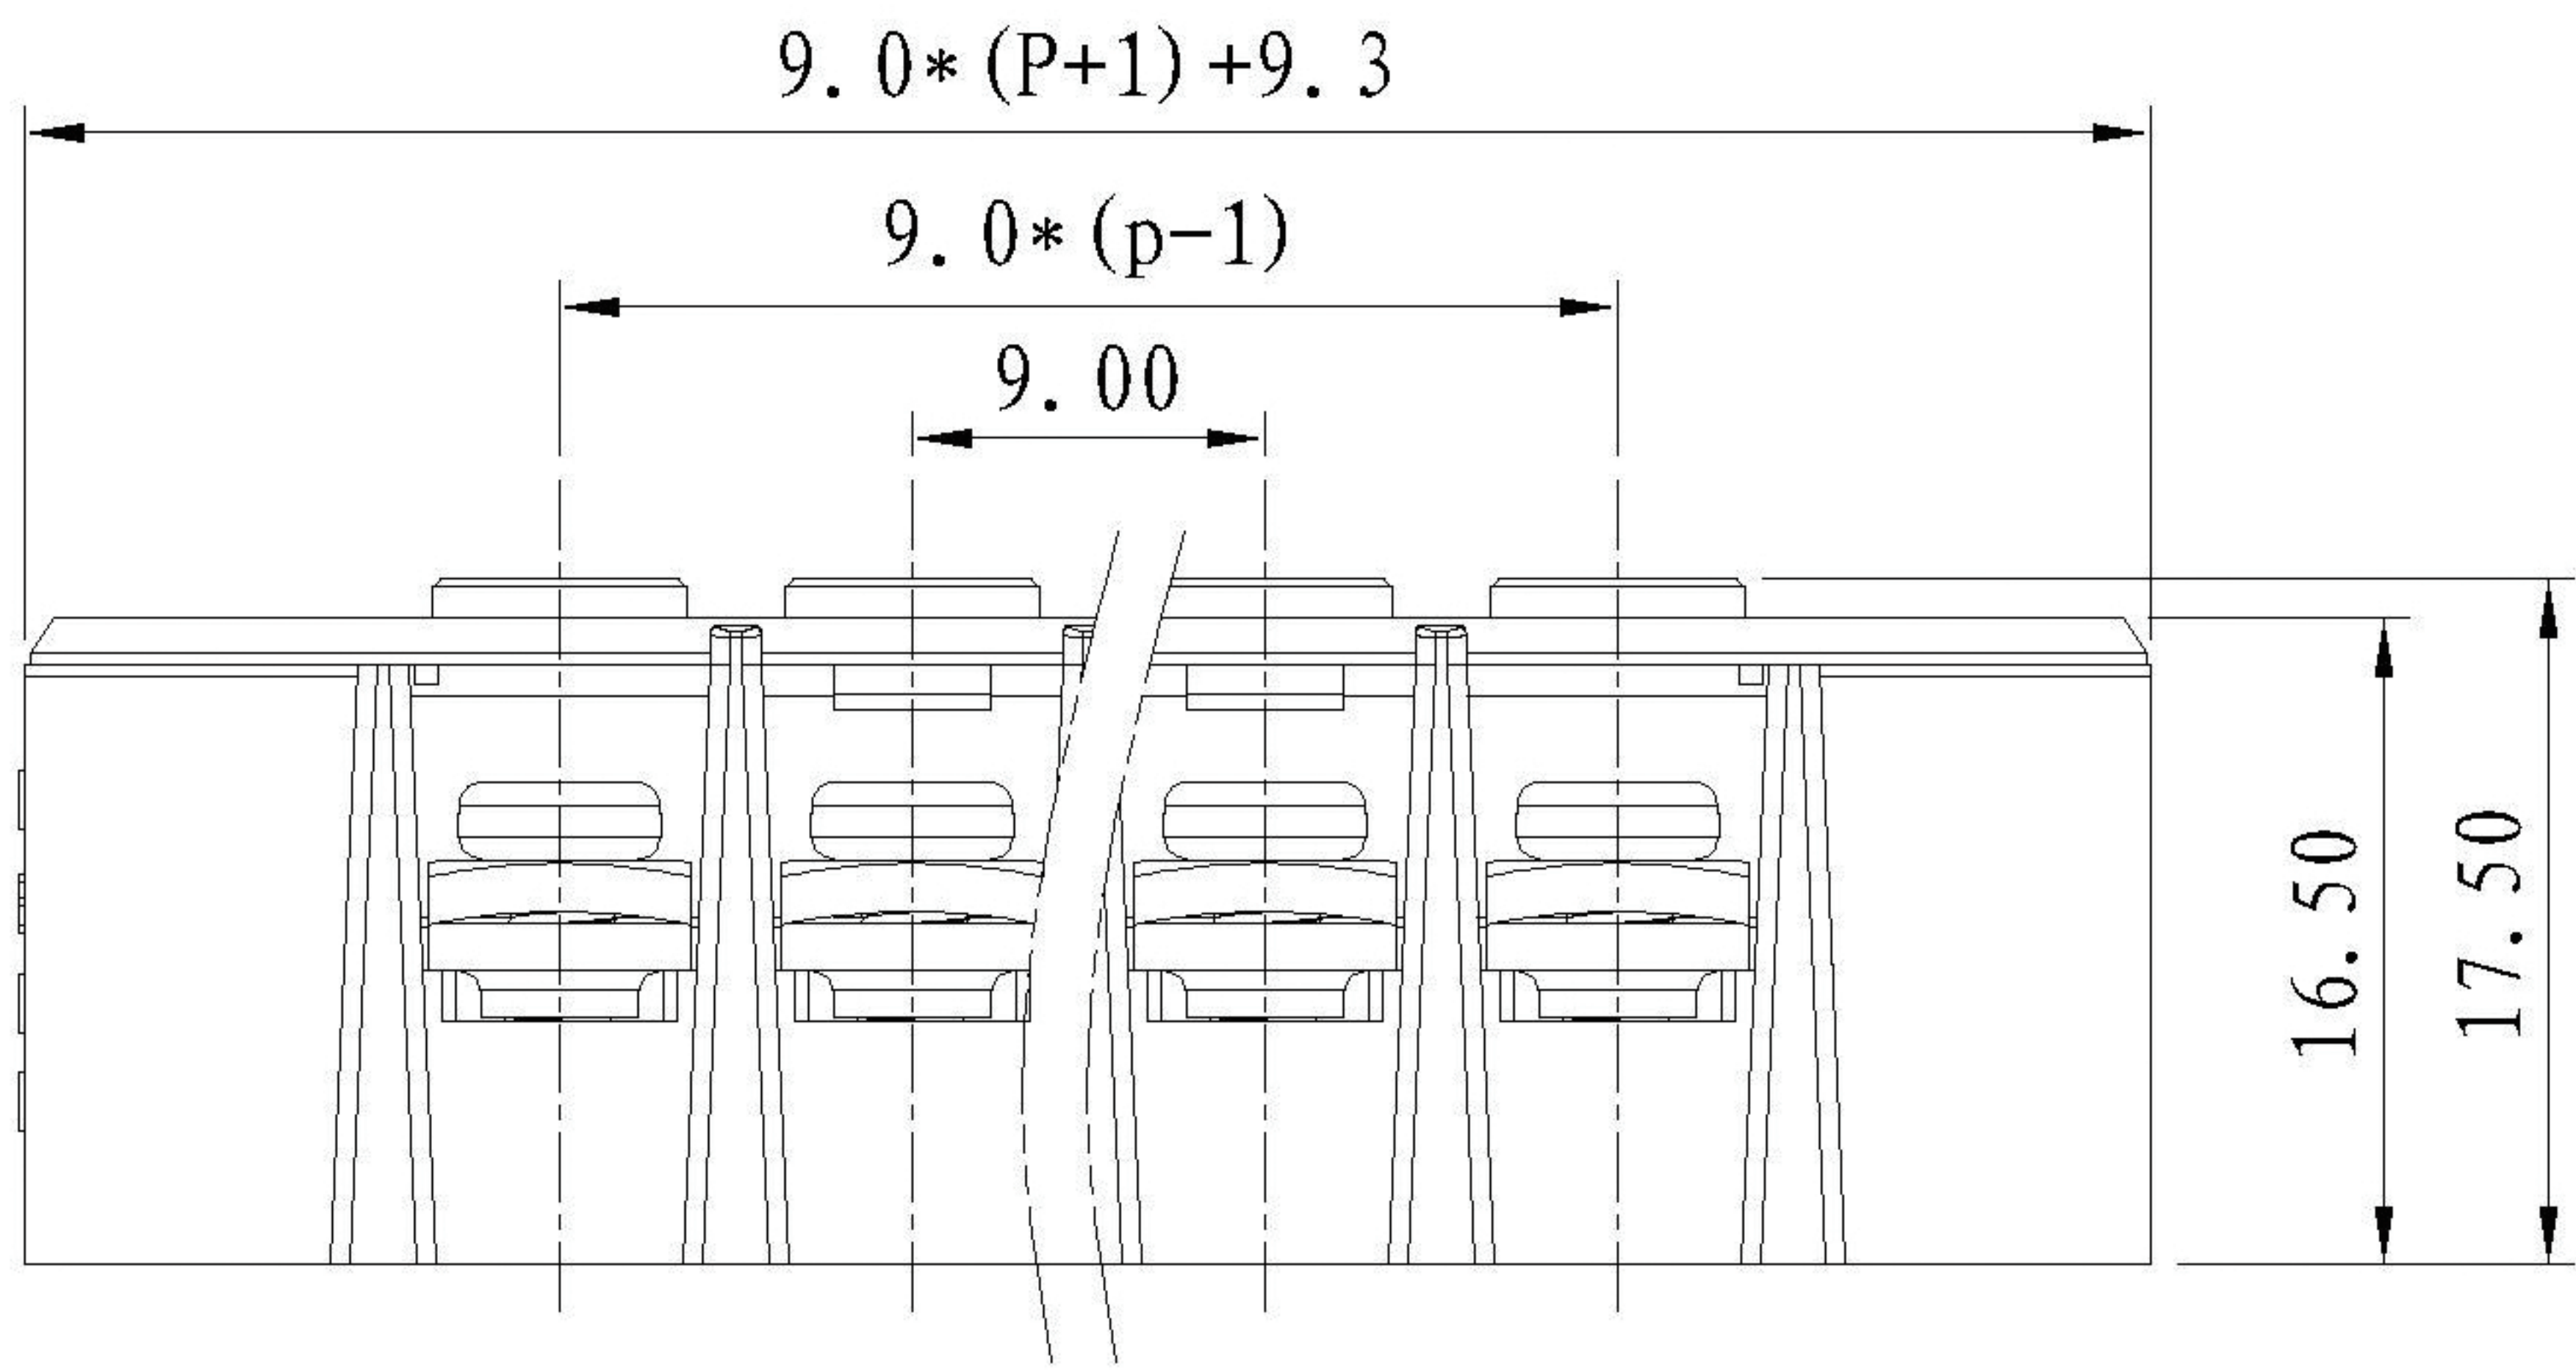


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行	更改人	日期

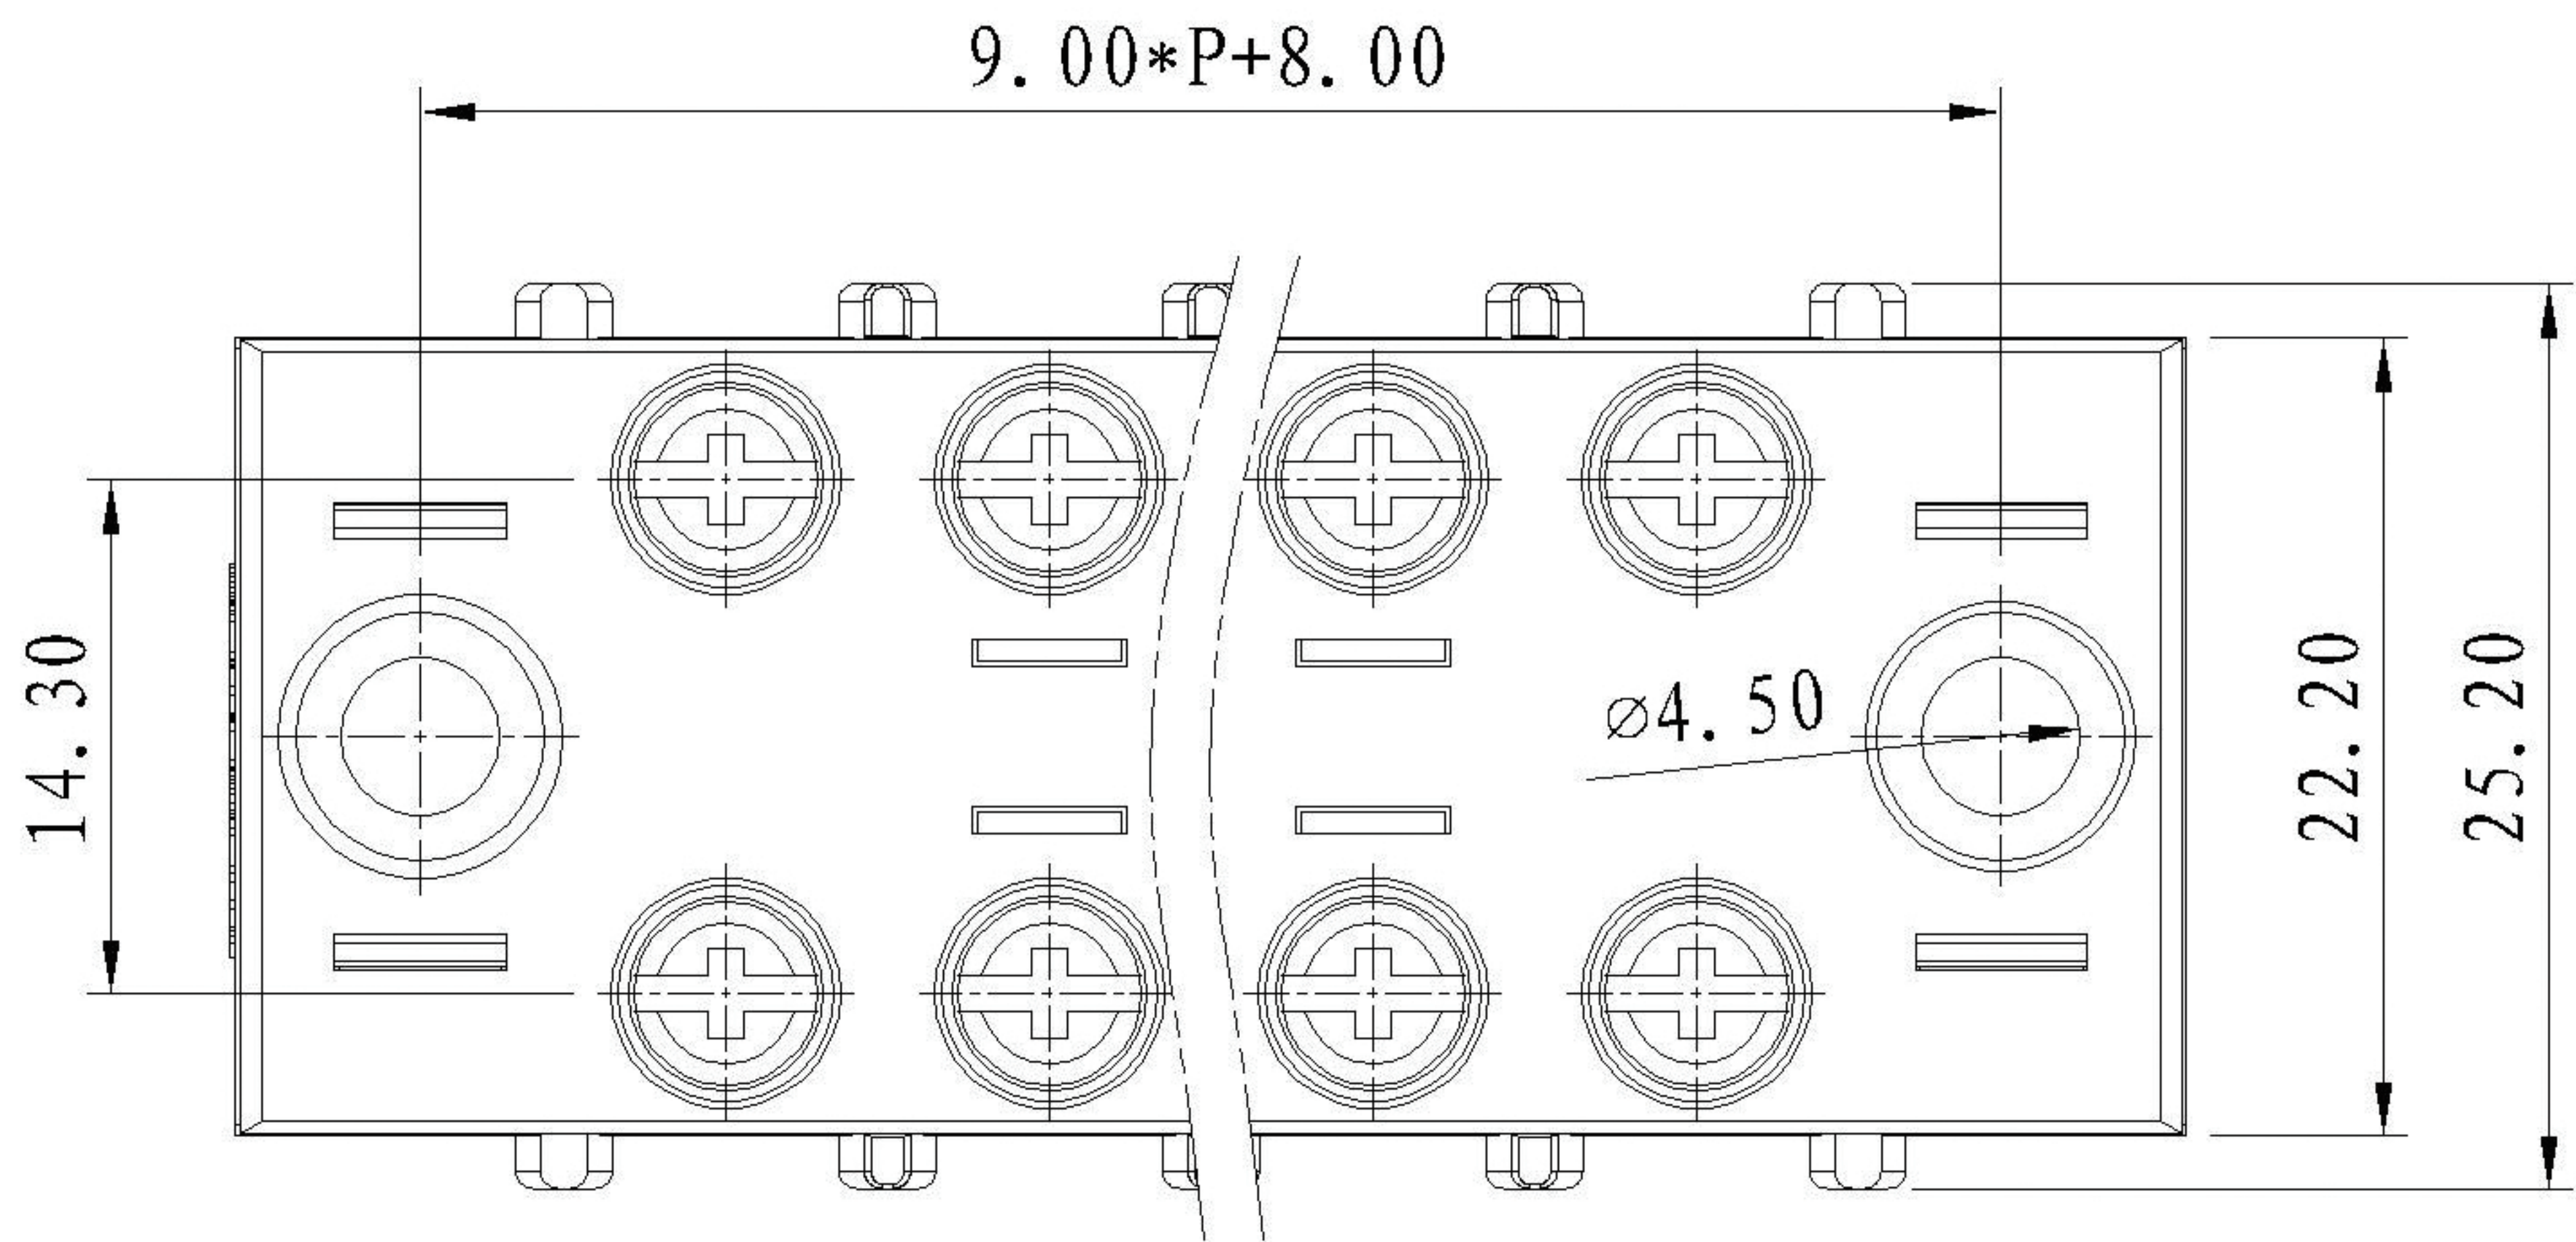

Specifications

Poles:2-20P

Voltage Rating:600V

Current Rating:15A

Screw Torque:M3/0.6-0.8


Insulation Resistance:PC/PA66

Flame retardant grade:V1/V0

Wire range:1.5mm²

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		short angle sid				≡	—	▤	//	⊥
	variable	range	to	over	over	over	to	over	to	over	over	over	to	to	over	over	over
			6	30	120	480	all	6	10	50	120	all	5	30	120		
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1'	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

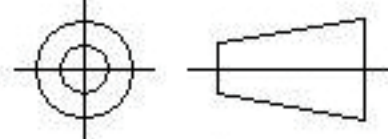4	TB1-15A-螺丝		SPAFA308031V		2P	黄铜	镀镍		
3	TB1-15A-导电件		6TB1BDD150AV		P	黄铜	镀镍		
2	TB1-15A-盖子		6TB1C0V1XX0V		1	PC			
1	TB1-15A-本体		6TB1E0V1XX0V		1	PC			
NO.		NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES	
DES.		LDD	DATE	2012/07/03	UNITS	mm	THIRD ANGLE PROJECTION		SHEET
CHK.			DATE		SIZE	A4			1 of 1
APP.			DATE		SCALE		DWG NO.	SP-2-6TB1E15	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD							TITLE		TB1-15A-XXP-1Y-00A-A
									TB1-15A-A-成品